


# DUSTMAC P-20

(661.020)

Voltage	(V)	400	Filter surface	(m <sup>2</sup> )	20
Motor	(kW)	2.2	No. of filter elements	(pc)	2
Ampere (400V/50Hz)	(A)	4.5	Filter material	dust classification M	
Rated Frequency	(Hz)	50	Weight	(kg)	430
Fuse	(A)	C 16	Intake	(mm)	160
Max. neg. pressure	(Pa)	2,000	Clean air discharge	(mm)	280
Max. airflow	(m <sup>3</sup> /h)	2,600	Dimensions (l x w x h)	(mm)	1,310 x 1,055x 3,250
No. of magnet valves	(pc)	2	Dust collection bin	(litre)	100
Sound level*	(dB)	78	Compressed air	(l/min)	(at 6 bar) 111

\*Measured according to the enveloping body method DIN EN ISO 3744 with an attached suction side piping and pressure side attached silencer. Measurement uncertainty noise approx. 4 dBA

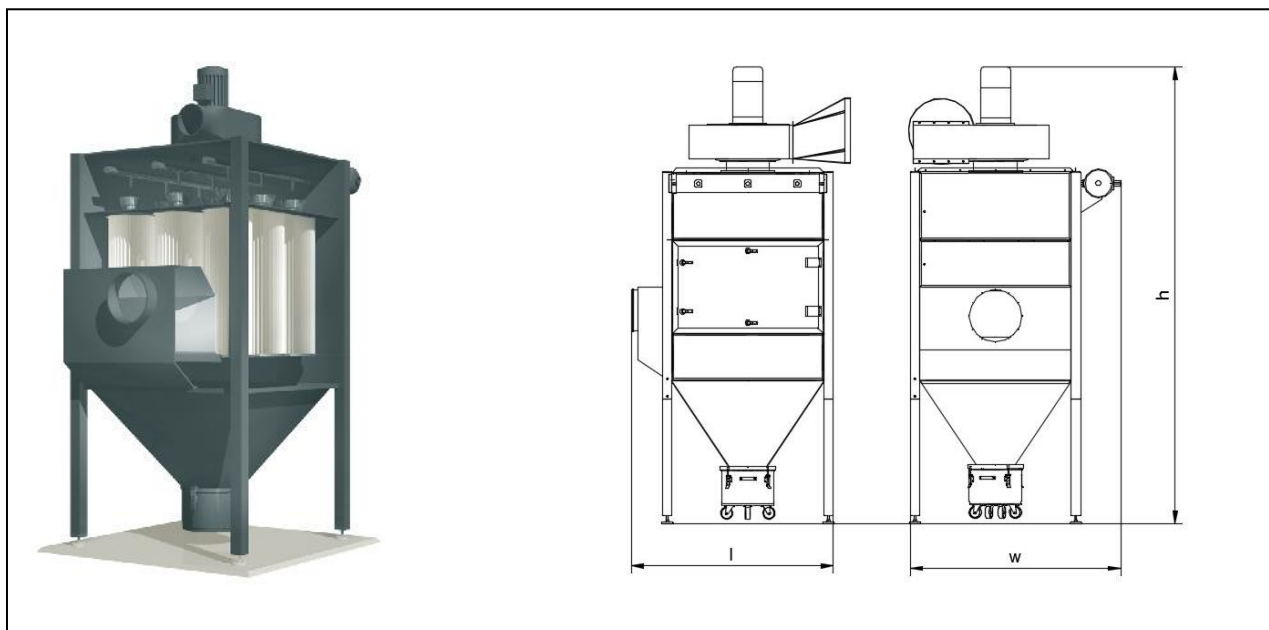

## ESTA PLUS

### Application range:

Central systems with multiple extraction locations at dust-producing machines  
For the extraction of dry, free flowing, non-explosive dust

### Your benefits at a glance

Modular for future expansion  
Customized design by ESTA personnel

### Characteristics:

Pulse-jet filter cleaning system  
Cleanable long life cartridge filters of dust classification M

### Special equipment:

- with special painting
- continuously electrically conductive
- extended feet
- further special versions available on request

State of the art: 661020-51-03 Subject to change without notice! For remaining questions, please do not hesitate to contact us.