


## DUSTOMAT 4-10 ATEX (Display)

(09.732)

Mains voltage	(V)	400	Main filter surface	(m <sup>2</sup> )	10
Nominal power	(kW)	2.2	Main filter quantity	(pc)	2
Mains frequency	(Hz)	50	Main filter material	M - filter cartridge	
Circuit breaker	(A)	C16	Cleaning type	Jet pulse	
Max. volume flow	(m <sup>3</sup> /h)	2,000	Post-filter surface	12,8	
Max. neg. pressure	(Pa)	2,600	Post-filter quantity	1	
Intake opening	(mm)	160	Post-filter material	H14 - filter cassette	
Sound pressure level	LpA(dBA)	68	Collection volume	(liter)	38
Comp. air consumption*	(l/impuls) approx.	19	Dimensions (L x W x H)	(mm)	1.460 x 910 x 1.440
Comp. air connection	(bar)	4 – 6	Weight	kg	260

\*at 4 bar with a valve opening time of 0.12 sec.

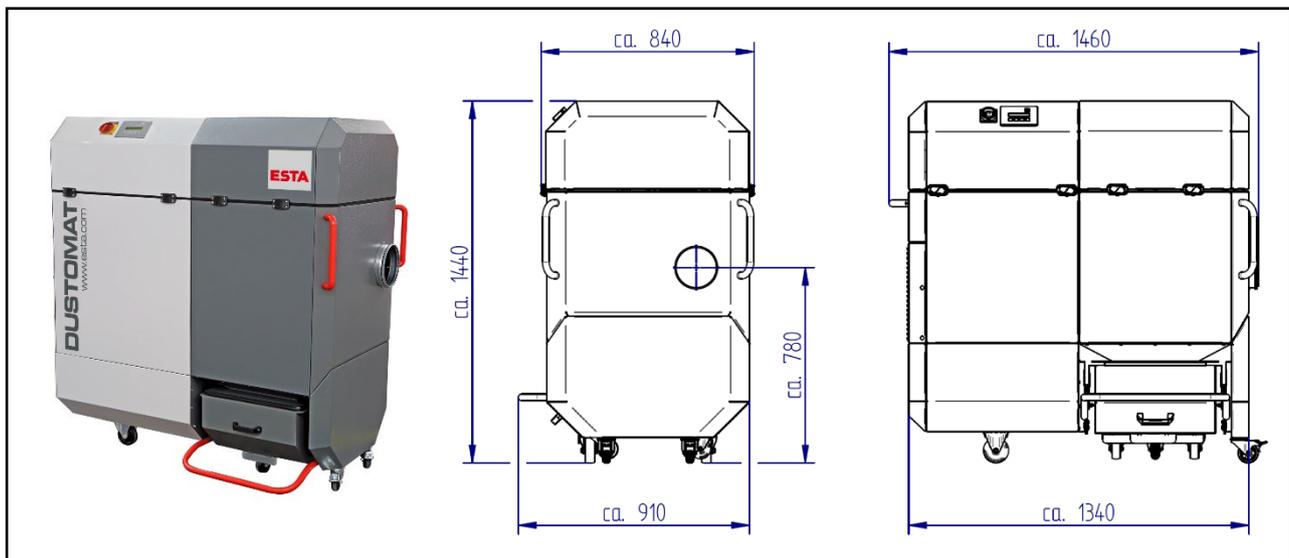

## ESTA PLUS

### Application range:

- Single or multi-station extraction in industry and trade
- Pourable, dry, flammable, conductive dust and shavings
- Installation location: EX-zone-free on the outside

### Your benefits at a glance

- All-purpose for dust and shavings
- Compact and powerful
- Low operating costs
- Convenient dust disposal
- Extremely quiet operation
- New innovative cabinet design, therefore providing a small footprint

### Characteristics:

- Integrated impact separator
- Mobile dust collection drawer for easy disposal
- Mobile on rolls
- Main filter: Cleanable long life cartridge filters (dust classification M)
- Control filter: Filter cassette dust classification H
- ATEX marking

### Optional:

With different filter cartridges, exhaust air connection, special voltage, special painting, pre-separators, external control with potential-free contact

State of the art: 09732-51-01 Subject to change without notice! For remaining questions, please do not hesitate to contact us.

ESTA Apparatebau GmbH & Co. KG  
 Gotenstraße 2 – 6  
 89250 Senden / GERMANY

Phone +49 7307 804-0  
 Fax +49 7307 804-500  
 E-Mail info@esta.com

[www.esta.com](http://www.esta.com)