


DUSTOMAT 4-24 H Display

(09.761)

Mains voltage	(V)	400	Post-filter surface	(m ²)	24
Nominal power	(kW)	7.6	Post-filter quantity	(pc)	2
Mains frequency	(Hz)	50	Post-filter material	M – filter cartridge	
Circuit breaker	(A)	C16	Cleaning type	Jet pulse	
Max. volume flow	(m ³ /h)	2.900	Main filter surface	(m ²)	17
Max. neg. pressure	(Pa)	3.500	Main filter quantity	(pc)	1
Intake opening \varnothing	(mm)	200	Main filter material	H – filter cassette	
Sound pressure level	LpA(dBA)	71	Collection volume	(liter)	38
Comp. air consumption* (l/impuls)		19	Dimensions (L x W x H)	(mm)	1.660 x 910 x 1.640
Comp. air connection	(bar)	4 - 6	Weight	(kg)	310

*at 4 bar with Valve opening 0,12 sec

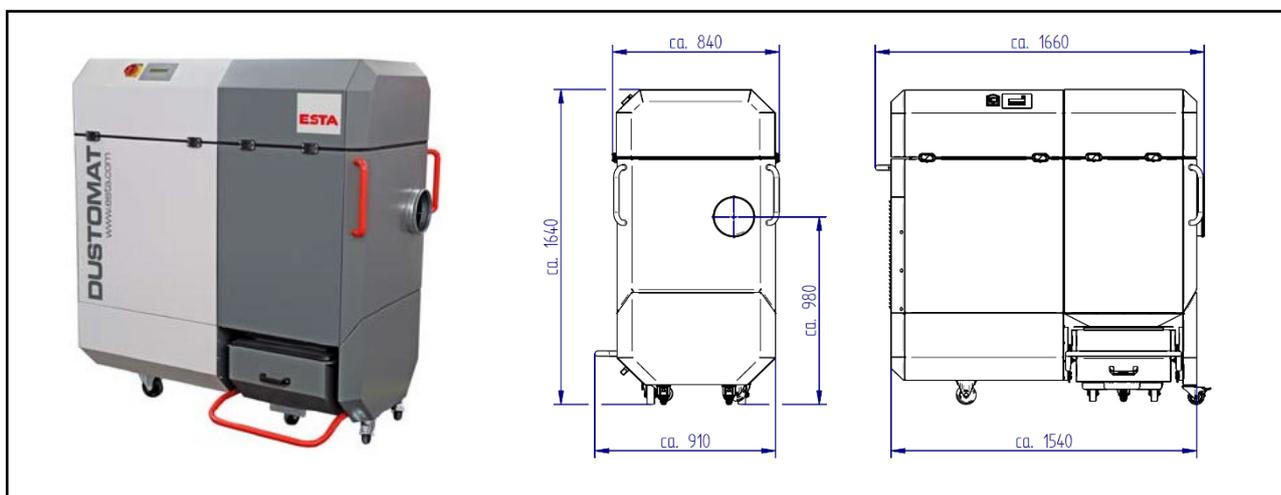

ESTA PLUS

Application range:

- Dust extraction at individual or multiple workstations or machines in industrial plants or smaller shops
- Pourable, dry, and hazardous dust and chips for the dust class H (DIN EN 603352-2-69 appendix AA)

Your benefits at a glance:

- All-purpose for dust and shavings
- Compact and powerful
- Convenient dust disposal
- Extremely quiet operation
- Low operating costs
- New innovative cabinet design, therefore providing a small footprint
- H-certified

Characteristics:

- Integrated impact separator
- Mobile dust collection drawer for easy disposal
- Mobile on rolls
- Post-filter: cleanable long life cartridge filters (dust classification M)
- Main filter: filter cassette dust classification H
- Test certificate: dust class H

Custom design/optional:

with different filter cartridges, exhaust air connection, special voltage, special painting, pre separators, external control with potential-free contact

State of the art: 09761-51-03 Subject to change without notice! For remaining questions, please do not hesitate to contact us.

ESTA Apparatebau GmbH & Co. KG
 Gotenstraße 2 – 6
 89250 Senden / GERMANY

Phone +49 7307 804-0
 Fax +49 7307 804-500
 E-Mail info@esta.com

www.esta.com